

Soft


---

**WaveFold**

---

Track**System**

owner's handbook





## INSTALLATION INSTRUCTIONS

### Step 1. Check Package Contents


Missing part? Call 800-264-1190

Mounting hardware includes the following:

Part	Quantity
a. Aluminum Track	1 (2 sections if over 104" wide)
b. Track Connector & Screws	1 (for 2 section tracks only)
c. Baton	1 for One-Way draw 2 for Center draw
d. Brackets (see pg. 4)	4 for tracks up to 86" wide 6 for tracks 86" to 104" wide 8 for tracks 104" to 172" wide 12 for tracks 172" to 208" wide
e. 1¼" Screws	2 per bracket

Note: Use dry wall anchors (not included) to mount to hollow wall board.

### Step 2. Tools Required

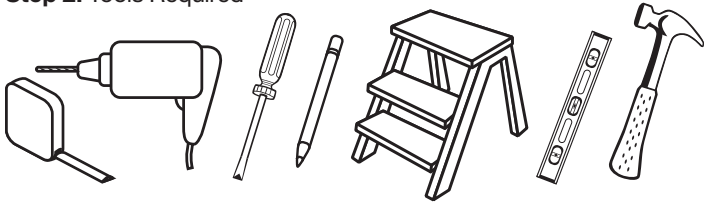

Tape Measure, drill, drill bits ( $\frac{3}{32}$ " for wall studs or ceiling beams,  $\frac{1}{4}$ " for wall anchors), screw driver, pencil, step stool or ladder, spirit level, hammer (to tap in anchors if necessary)

### Step 3. Bracket Location and Installation

Read these instructions from start to finish before proceeding. It is a very good idea to recruit a helper when installing the track. Measure the length of your draperies carefully, and then familiarize yourself with the method of attachment to the track system in order to determine the proper height of the brackets.

**Length/Height:** Add 1" for the height of the track. Add an additional 1" for floor clearance for floor length treatments. For window length treatments, predetermine where you want the bottom hem to fall and position the brackets accordingly.

**4 Brackets:** Place one bracket at each end of the track; and place a bracket 4" to 6" to the left of the center of the track, and a bracket 4" to 6" to the right of center.

**6 to 12 Brackets:** Position (4) brackets as described above and then evenly space one, two or three brackets between the end bracket and the center bracket on the left side of the track, and repeat on the right side of the track. You will have a total of 6, 8 or 12 brackets based on the width of the track.


The Brackets must be level and perfectly aligned! You can make pencil marks on the top of the track sections to correspond with the bracket positions, and then utilize the level while using the track as a straight-edge to achieve perfect alignment by making pencil marks on the wall or window frame at the bracket locations.

Position the brackets and make pencil marks for the screw locations.

It is recommended that the screws be driven directly into a wall stud – deviate from the recommended bracket spacing based on the location of the wall studs.


If it is not possible or practical to mount to wall studs, use dry wall anchors (not included).

Drill starter holes for the screws or screws and anchors. Attach each bracket using the 1/4" screws.

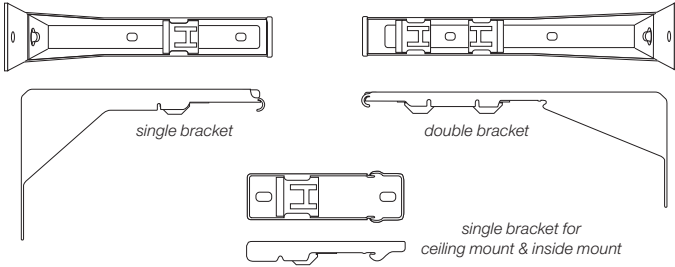


#### Step 4. Securing the Track

Some tracks will come in two sections. Slide the Connector onto the track as illustrated. Tighten the screws and make sure the Connector is securely attached to both track sections. This assists in alignment when attaching the track to the brackets, and maintains rigidity at the center-point after installation.

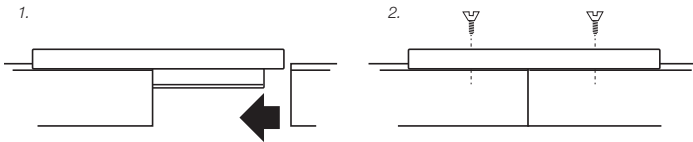

Snap the track into the brackets as shown. Place the top-front of the track into the hook at the front of the bracket, and then press the back of the track upward until the plastic retainer snaps onto the back of the track.

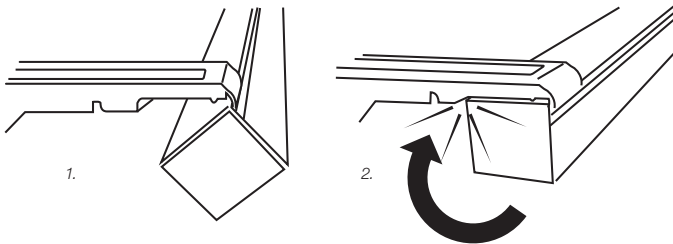

For Double Brackets, attach the rear track first. Place the top-back of the track into the hooks at the back of the bracket, and then push front of the track upward until the plastic retainer snaps onto the front of the track. Attach the front track as described above.


For ceiling mounted double treatments, the brackets for the rear track must be at least 2" from the wall, and the brackets for the front track must be 3/4" to 1 1/2" from the rear brackets.

Make sure each bracket is properly attached to the track before proceeding.

To remove the track, use a flat head screwdriver; place it in the slot of the plastic retainers and press backward to release the track. The screwdriver can also be used to assist in compressing the springs when installing the track.

**Step 5. Attach the Baton(s)**

For center-draw, put one Baton on one side the double carrier that controls the movement of the left panel and one Baton on the double carrier that controls the movement of the right panel. For one-way-draw, put the Baton on the double carrier on the end that will control the movement of the panel. The Batons are designed to fit tightly, so grasp the track securely when you snap them onto the carrier(s).

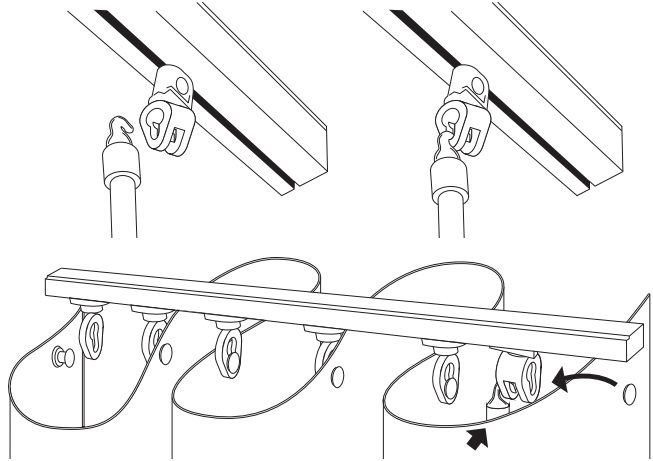


**Step 6. Attach the Panel(s)**

The drawings show the proper attachment of the panel heading to the carriers in the track.


Place the metal studs into the carriers and then pull downward to lock them in place.

**Fixed End**

Attach two studs to the Double Carrier at the end of the track as shown. The end of the panel should be facing the wall or window.

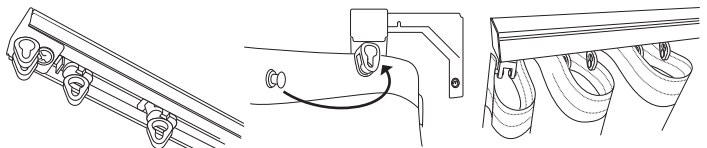

Attach a stud to each Single Carrier as described above and shown below.

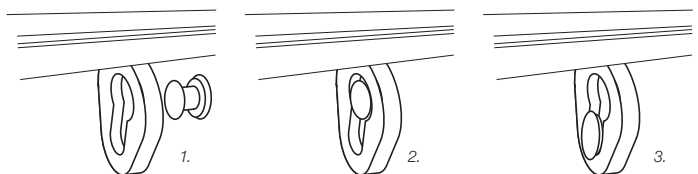


### Draw End

The stud at this end of the panel is attached to the Double Carrier that the wand is attached to (see Step 5 above). Note that the wand should be positioned inside the first fold when the stud at that end of the panel is attached. To traverse the panel(s), reach inside the first fold in order to grasp the Baton and then pull or push slowly to move the panel.

### Fixed End for Double Track Installations

Install the panel(s) for the under-treatment first. The last stud will attach to the inside of the fixed double carrier at the end of the track.

Then attach the face panel(s). The last stud will attach to the outside of the fixed double carrier on the rear track. See illustrations below.

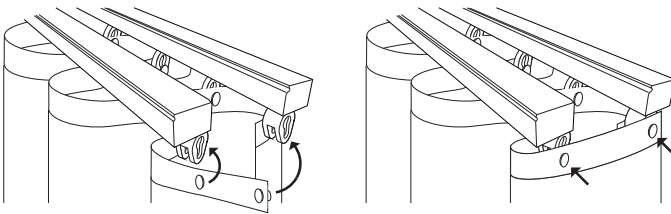

## **WHAT TO EXPECT WHEN YOU RECEIVE YOUR SOFT WINDOW TREATMENTS**

The packaging and shipping of soft treatments frequently results in minor wrinkling of the fabrics used.

There are different characteristics and handling needs for the variety of fabrics offered in this program.

Please refer to the descriptions below for guidance on how to remedy minor wrinkles upon delivery.

First, allow all items to hang for a few days so wrinkles relax and begin to fall out.

**Silk fabrics**

- Silk has natural irregularities that give the fabric its unique and desired character. The appearance of slubs, nubs, loops and barre ridges are universally accepted as normal and should not be considered defects.
- Silk should be lined with Thermal Sateen or Blockout lining to avoid color fading.
- If necessary, steam silk to remove stubborn wrinkles. Please note that a good quality steamer is needed so water spots won't form from water spitting out from the steaming device.

**Rayon/Poly blends**

- If necessary, steam rayon/poly blends to remove stubborn wrinkles. Please note that a good quality steamer is needed so water spots won't form from water spitting out from the steaming device.

**100% Polyester**

- If necessary, steam polyester or gently iron on a low heat setting to remove stubborn wrinkles. 100% Polyester fabrics will release

wrinkles easily by steaming or ironing on the Polyester / Synthetic Fabrics setting (Low), but may melt if the iron is too hot.

Cotton/Poly blends

- If necessary, gently iron on a Blended Fabric (Medium) heat setting to remove stubborn wrinkles.

100% COTTON and 100% LINEN

- If necessary, gently iron on a Cotton (High) heat setting to remove stubborn wrinkles.

General Cleaning Guidance:

- Dry Cleaning is the best method to clean soiled soft window treatments.

- However on 100% Polyester, Cotton/Poly blends, 100% Cotton and 100% Linen you may: Spot clean with warm soapy water using mild detergent and a clean sponge. Air dry, and then steam or iron as guided above.

## REPLACEMENT PARTS

In the event that replacement parts are ever needed, you may call: 1-800-264-1190

Please be sure to provide the following information, if possible:

- The complete model or catalog number of your product
- A description of the product
- A description of the part needed

## LIMITED LIFETIME WARRANTY

The enclosed product is warranted to the original residential retail purchaser as long as the product remains in the original window.

### Covered:

**Lifetime:** Entire product against manufacturing defects (i.e. a flaw in the product design, materials, or workmanship that causes the product to no longer function)

**3 years:** Cords including internal cords such as those found in cordless blinds. **5 years:** All fabric

### Not Covered:

Normal Wear and Tear

**Any product that fails due to:** abuse • exposure to salt air • improper installation • accident • extraordinary use • improper operation • alterations • improper cleaning • misapplication • damage from pests/insects/pets • improper handling • misuse.

**Natural wood products that have:** loss of color intensity • yellowing or cracking of plastic parts or foam wood product • variations in color, grain, or texture • warping of wood slats in high humidity areas.

**Costs associated with:** product removal • transportation to and from the retailer • brand label removal • product remeasure • incidental or consequential damages • product reinstallation • shipping.

In the event there are multiple blinds/shades in the same room, only the

defective blind/shade will be replaced.

**To Report Shipping Damage:**

If damage occurred during shipping, call place of purchase and report within 7 calendar days or else you may be denied credit for your damaged product.

**To Obtain Service:**

If you suspect this product has a manufacturing defect in materials or workmanship:

1. Locate the sales receipt
2. Call place of purchase

Any unauthorized returns will not be accepted.

**Warranty Remedy:**

**THIS SHALL BE YOUR SOLE REMEDY UNDER THIS LIMITED WARRANTY.**

If this product is found to have a manufacturing defect in materials or workmanship, we will (at our discretion) do one of the following

- repair the product
- replace the product
- refund the cost of the product

Colors vary from lot to lot and may not exactly match sample swatch or previous purchases. Discontinued items or color selections will be replaced with the closest equivalent current product.

**YOUR RIGHTS UNDER STATE LAW:**

This lifetime limited warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Some states do not allow limitations on how long a warranty lasts, so the above limitations may not apply to you.

No agent, representative, dealer, or unauthorized employee has the authority to increase or alter the obligation of this warranty. This lifetime limited warranty supersedes any previous versions.

For all questions, please call (800) 264-1190

Hours of operation are 8:00AM to 5:00PM CST



Soft  
WaveFold  
Track**System**